

Feature


400# WOG
 DZR lead free brass body
 Full port
 PEX (F1960) x Flange
 Chrome plated ball
 Virgin PTFE seats
 Blow-out proof stem
 3-piece construction
 Rotating flange design
 ¼-turn operation
 Positive shutoff
 Bolt kits included
 Wing handle included
 AB1953, NSF/ANSI 61 & 372 certified



Pressure/ Temperature rating		
300 psi from 15 °F to 160 °F	150 psi max. at 200 °F	

Material

Part	Material	Specification
1 Body	DZR Lead Free Brass	ASTM B927 C27453
2 End piece	DZR Lead Free Brass	ASTM B927 C27453
3 Ball	DZR Lead Free Brass / Cr plated	ASTM B927 C27453
4 Seat	PTFE	PTFE
5 Flange	Brass	ASTM B283 C37700
6 O-ring	NBR 70SH	NSF approved
7 Stem	DZR Lead Free Brass	ASTM B927 C27453
8 Handle	Steel / Dacromet® plated	ASTM A36
9 Handle nut	Steel / Zn plated	ASTM A36

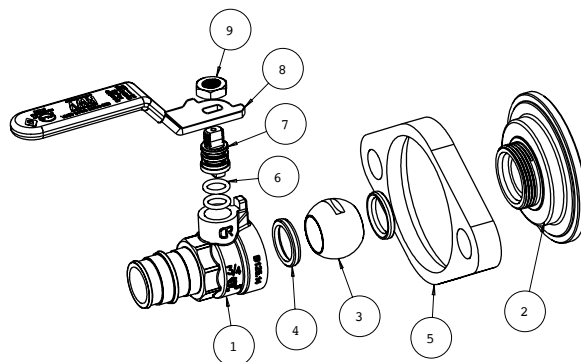

Dimension, Weight

Size	B [in]	C [in]	H [in]	L [in]	φ P [in]	Wt. [lb]
¾"	2.51	4.61	1.78	3.59	0.60	1.02
1"	2.94	4.67	1.93	3.59	0.80	1.20

