381

Iron Flanged Wye Strainer

Feature

- 125# WSP
- 200# WOG
- Iron body
- Flanged ends per ANSI B16.5
- SS304 perforated screen
- Bolted cap with clean out plug
- ¾" side port with plug




Material

	Part	Material	Specification
1	Body	Cast Iron / Ductile Iron[1]	A126-B / A536[1]
2	Screen	Stainless Steel	SS304
3	Bonnet	Cast Iron / Ductile Iron[1]	A126-B / A536[1]
4	Plug	Steel	-
5	Cap Bolt	Steel	-
6	Gasket	EPDM	-

[1] Ductile iron A536 for 8" and above

Dimension, Weight

Size DN	D [in]	D1 [in]	H [in]	L [in]	b [in]	d [in]	N - h [in]	Clean out [in]	Cv	Wt. [lb]
2"	5.98	4.76	4.92	8.86	0.75	0.079	4 - 0.75	1	52	19.8
2½"	7.01	5.51	5.91	10.75	0.75	0.079	4 - 0.75	1	80	23.4
3"	7.52	5.98	6.89	11.50	0.79	0.079	4 - 0.75	1	116	32.4
4"	9.02	3.58	7.68	13.86	0.79	0.079	8 - 0.75	1¼	205	46.2
5"	10.00	8.50	9.25	16.54	0.87	0.118	8 - 0.88	1¼	325	65.0
6	10.98	9.49	10.83	18.50	0.91	0.118	8 - 0.88	1½	465	91.8
8"	13.50	11.77	13.78	21.38	0.98	0.197	8 - 0.88	1½	845	131
10"	15.98	14.25	16.54	25.98	1.10	0.197	12 - 1.00	1½	1350	205
12"	19.02	17.01	19.29	30.00	1.30	0.197	12 - 1.00	1½	2080	269

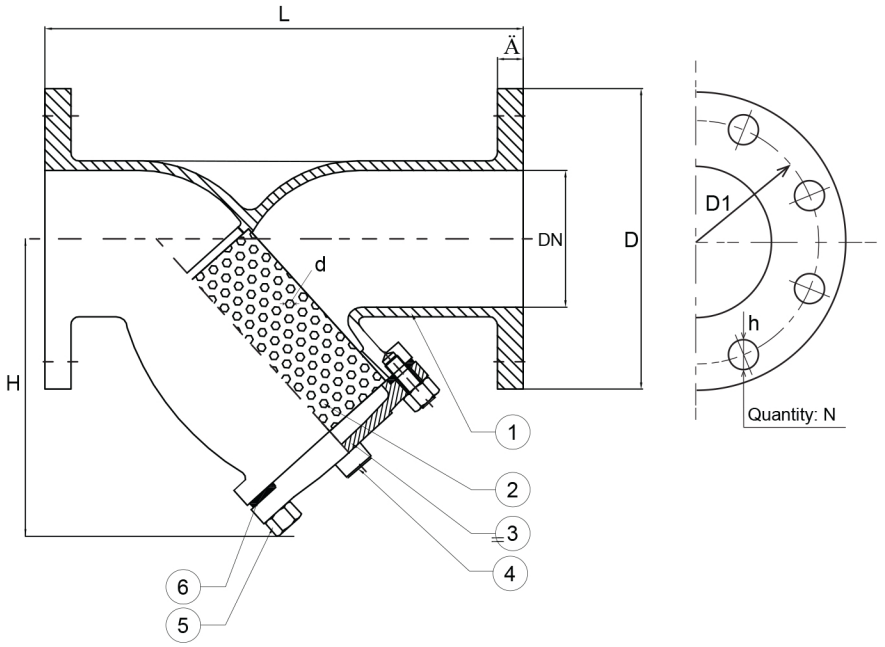

WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Drawings, photos and data are provided for information only and subject to change without notice. No part of this document may be reproduced copied, modified or adapted, without the prior written consent of the copyright owner, unless otherwise indicated.
The drinking Water Act has defined lead free as having the average wetted surface ratio of the fixture to contain less than .25% of lead per volume.

© 2026 RED-WHITE VALVE CORP. All Rights Reserved