

# STAINLESS STEEL COUNTER-SUNK HEX HEAD PLUG

## Features:


- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- No package quantity required

## Certifications and Compliances:

- UL/cUL 514B Listed
- UL File# E506058

## Applications:

To plug or close outlets on conduit fittings, and to dead end conduit runs with use of couplings.

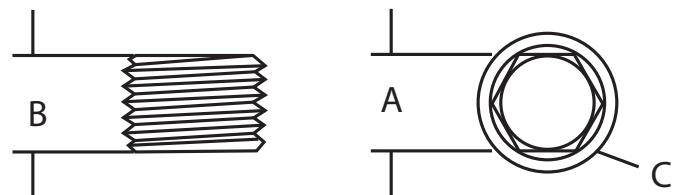

| Part Number | Trade Size (in) | A (Allen Wrench/ Hex Key) (in) | B (in) | C (in) | OD (in) | Weight per each (lb) |
|-------------|-----------------|--------------------------------|--------|--------|---------|----------------------|
| S60500CSHP  | 1/2             | 3/8                            | 0.540  | 0.150  | 0.840   | 0.060                |
| S60700CSHP  | 3/4             | 9/16                           | 0.540  | 0.150  | 1.050   | 0.090                |
| S61000CSHP  | 1               | 5/8                            | 0.690  | 0.220  | 1.315   | 0.190                |
| S61200CSHP  | 1 1/4           | 3/4                            | 0.700  | 0.350  | 1.660   | 0.310                |
| S61500CSHP  | 1 1/2           | 1                              | 0.810  | 0.350  | 1.900   | 0.460                |
| S62000CSHP  | 2               | 1                              | 0.880  | 0.590  | 2.375   | 0.880                |
| S62500CSHP  | 2 1/2           | 1                              | 1.165  | 0.750  | 2.875   | 1.820                |
| S63000CSHP  | 3               | 1                              | 1.180  | 1.180  | 3.500   | 2.870                |
| S64000CSHP  | 4               | 1                              | 1.180  | 1.650  | 4.500   | 4.720                |

All dimensions are for informational purposes only \*Tolerances +/- 5%

