

Stainless Steel Escutcheon Plates, Wall Flanges

Features:


- Manufactured in type 304 stainless steel
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- No package quantity required

Certifications and Compliances:

- UL 514D Listed
- UL File # E213669

Applications:

Stainless steel Escutcheons are used in conjunction with mechanical, electrical, and plumbing components and fixtures where a pipe, tube or conduit passes through a wall [or other material] surface. The escutcheon is used to bridge the gap between the outside diameter of the conduit and the inside diameter of the opening.

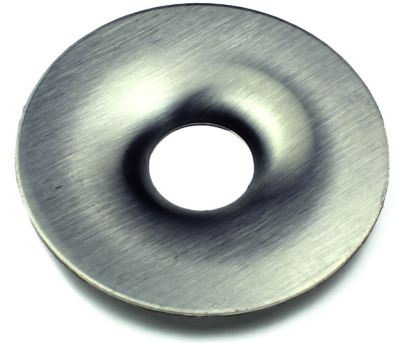

Part Number	Trade Size	OD	Hole Dia.	Overall Height	Weight per each
	(in)	(in)	(in)	(in)	(lb)
S40500EP00	1/2	3	0.850	0.285	0.09
S40700EP00	3/4	3	1.060	0.350	0.10
S41000EP00	1	3	1.350	0.450	0.12
S41200EP00	1 1/4	6	1.750	0.585	0.30
S41500EP00	1 1/2	6	1.920	0.350	0.30
S42000EP00	2	6	2.400	0.440	0.32
S42500EP00	2 1/2	6	2.900	0.500	0.32
S43000EP00	3	6	3.530	0.500	0.35
S44000EP00	4	7	4.530	0.500	0.40

All dimensions are for informational purposes only *Tolerances +/- 5%

