


STAINLESS STEEL FLEX TO RIGID CONNECTORS

Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Excellent strength and durability
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Approved for damp locations when used with Calbrite’s PVC and Clear Coated flex conduit
- No package quantity required




Certifications and Compliances:

- NEMA 4X approved
- Temperature Ratings:
 - Stainless steel body – approx. 1700°F
 - Internal plastic ferrule (white) – approx. 450°F

Applications:

Used to connect stainless flexible conduit to rigid conduit. Assists in preventing contamination of oils, dirt, dust, and liquid when used with Calbrite PVC coated stainless flexible conduit. Flexible stainless steel conduit can be used for protecting electronic and electrical wires and cable. Suitable for corrosive environments, including pumps, motors, HVAC systems, machine tools, electrical housings and cabinetry.

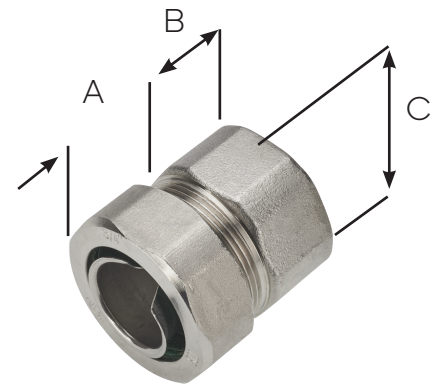

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	Weight per each (lb)
S60500FCR0	½	0.875	0.750	1.310	0.268
S60700FCR0	¾	0.875	0.750	1.630	0.316
S61000FCR0	1	1.000	0.813	1.880	0.568
S61200FCR0	1 ¼	1.130	0.875	2.250	0.718
S61500FCR0	1 ½	1.130	0.875	2.500	0.856
S62000FCR0	2	1.250	0.938	3.000	1.218

All dimensions are for informational purposes only *Tolerances +/- 5%

