


STAINLESS STEEL LB CONDUIT BODIES

Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No package quantity required
- Cover and Gasket set included
- Form 8 style
- FDA Approved, white neoprene gasket
- Use of hex head cap screws helps prevent any harboring points

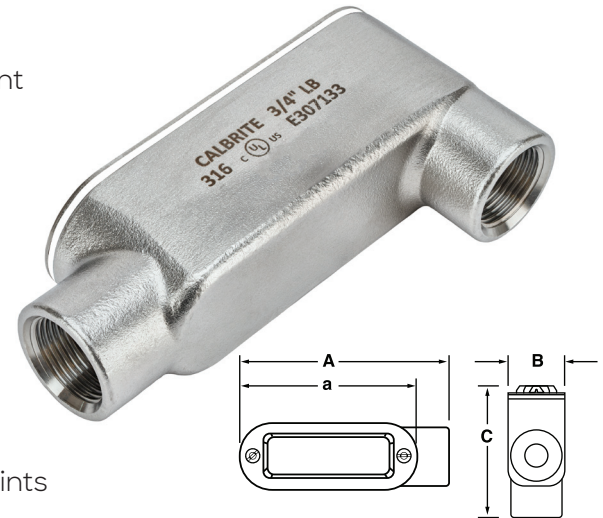

Certifications and Compliances:

- UL 514A Listed
- UL File # E307133
- CSA C22.2 No. 18.1
- NSF/ANSI 169 Certified
- 21CFR175.300 / FDA approved neoprene gasket
- Article 314 of ANSI/NFPA70, National Electrical Code (NEC)
- Approved for wet locations, IP69 Rated

Materials:

- Body: 316SS
- Gasket: Neoprene
- Cover and Screws: 316SS

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings. Accessible wiring chamber provides a spacious location to make splices.



Part Number	Trade Size (in)	A (in)	B (in)	C (in)	a (in)	Cubic Inches (in)	Weight per each (lb)
S60500LB00	½	5.132	1.320	2.510	4.320	4	0.95
S60700LB00	¾	5.739	1.550	2.929	4.950	7	1.65
S61000LB00	1	6.673	1.750	3.025	5.650	11	2.17
S61200LB00	1¼	7.635	2.200	3.925	6.600	20	3.54
S61500LB00	1½	8.868	2.530	4.150	7.810	35	4.73
S62000LB00	2	11.274	3.460	4.478	10.00	71	7.33
S62500LB00	2½	13.612	4.650	6.237	12.00	157	15.40
S63000LB00	3	13.695	4.650	6.320	12.00	177	16.60
S64000LB00	4	16.420	5.850	7.770	14.63	380	32.38

All dimensions are for informational purposes only *Tolerances +/- 5%

