

STAINLESS STEEL LR CONDUIT BODIES


Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No package quantity required
- Cover and Gasket set included
- Form 8 style
- FDA Approved, white neoprene gaskets
- Use of hex head cap screws helps prevent any harboring points



Certifications and Compliances:

- UL 514A Listed
- UL File # E307133
- CSA C22.2 No. 18.1
- NSF/ANSI 169 Certified
- 21CFR175.300 / FDA approved neoprene gasket
- Intended for installation in accordance with Article 314 of ANSI/NFPA 70, National Electrical Code (NEC)
- Approved for wet locations, IP69 Rated

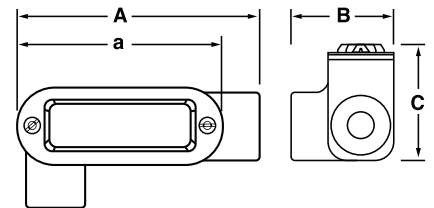

Materials:

- Body: 316SS
- Gasket: Neoprene
- Cover and Screws: 316SS

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings. Accessible wiring chamber provides a spacious location to make splices.



Part Number	Trade Size (in)	A (in)	B (in)	C (in)	a (in)	Cubic Inches (in)	Weight per each (lb)
S60500LR00	½	5.132	2.132	1.700	4.320	4	1.10
S60700LR00	¾	5.739	2.474	1.975	4.950	7	1.55
S61000LR00	1	6.680	2.790	2.225	5.650	11	2.18
S61500LR00	1½	8.868	3.585	3.095	7.810	35	4.90
S62000LR00	2	11.274	4.610	3.353	10.00	71	7.67

All dimensions are for informational purposes only *Tolerances +/- 5%

