


STAINLESS STEEL HYGIENIC FLEX STRAIGHTS

Features:

- Type 316 stainless steel
- Straight (NPSM thread) thread
- Food contact and hygienic conduit fitting for use with Hygienic Flex conduit
- Face Seal & Nut Seal = FDA Grade Thermo Plastic Co-Polyester
- Conduit seal and insulated throat = FDA Grade Polyamide 6
- Color = Stainless steel, All plastic parts = Blue

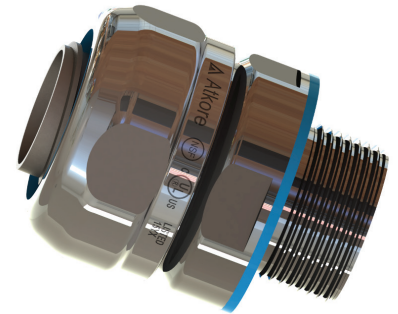


Technical Properties:

- High tensile strength
- Oil resistant
- Corrosion resistant
- Temperature performance = -58°F to 275°F

Certifications and Compliances:

- NEMA 4X Approved
- UL 514B Listed
- CSA Certified
- UL File # E247502
- IP rating: IP66 + IP67 + IP68 + IP69
- ROHS
- NSF/ANSI 169 Certified
- Low Fire Hazard - Halogen, Sulphur & Phosphorous Free Seals

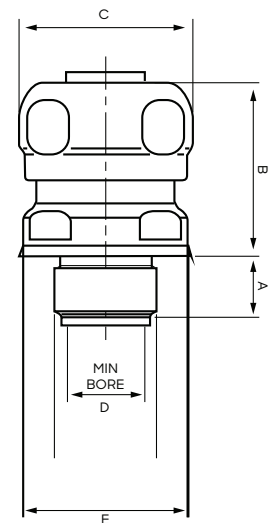

Applications:

Suitable for knockouts or threaded entries. Stainless Steel compression fitting comprising of nut, insert and polyamide 6 compression seal. Easy assembly and high mechanical strength.



Part Number	Trade Size (in)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight per Each (lb)
S60500FCHG	½	0.47	1.34	1.34	0.57	1.26	0.25
S60700FCHG	¾	0.55	1.39	1.57	0.74	1.50	0.35
S61000FCHG	1	0.59	1.52	1.87	0.97	1.75	0.46
S61200FCHG	1¼	0.63	1.67	2.32	1.29	2.17	0.75
S61500FCHG	1½	0.63	1.83	2.55	1.48	2.44	1.00
S62000FCHG	2	0.63	1.83	2.99	1.93	2.95	1.28

All dimensions are for informational purposes only *Tolerances +/- 5%

