


STAINLESS STEEL T CONDUIT BODIES

Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No package quantity required
- Cover and Gasket set included
- Form 8 style
- FDA Approved, white neoprene gaskets
- Use of hex head cap screws helps prevent any harboring points

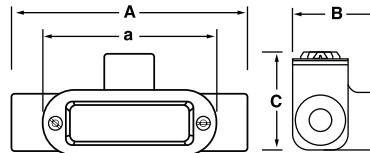

Certifications and Compliances:

- UL / cUL 514A Listed
- UL File # E307133
- Article 314 of ANSI/NFPA 70, National Electrical Code (NEC)
- 21CFR175.300 / FDA approved neoprene gasket
- CSA C22.2 No. 18.1
- Canadian Electrical Code (CEC), Part 1, Standard for Electrical Installations
- Approved for wet locations, IP69 Rated
- NSF/ANSI 169 Certified

Materials:

- Body: 316SS
- Gasket: Neoprene
- Cover and Screws: 316SS

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings. Accessible wiring chamber provides a spacious location to make splices.



Part Number	Trade Size (in)	A (in)	B (in)	C (in)	a (in)	Cubic Inches (in)	Weight per each (lb)
S60500TE00	½	5.940	2.132	2.030	4.320	5	1.33
S60700TE00	¾	6.538	2.474	2.320	4.940	9	1.89
S61000TE00	1	7.488	2.735	2.330	5.688	13	2.67
S61200TE00	1¼	8.730	3.280	2.900	6.600	24	3.96
S61500TE00	1½	9.923	3.585	3.000	7.810	35	5.20
S62000TE00	2	12.300	4.700	3.880	10.000	77	8.89
S62500TE00	2½	15.290	6.200	4.550	12.000	160	16.68
S63000TE00	3	15.330	6.280	4.520	12.000	177	16.68
S64000TE00	4	18.340	7.610	5.930	14.630	382	33.50

All dimensions are for informational purposes only *Tolerances +/- 5%

