




# DUCT RODDER ACCESSORIES

5/16" (8mm) - 1/2" (13mm)

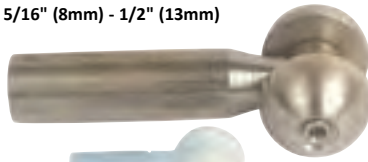

3/16" (5mm) - 1/4" (6mm)



## Roller Guide

Helps guide the duct rod around bends, sweeps, and duct misalignments. Also used when the conduit is already occupied by other cables.

| US Duct Rodders Rod Diameter (in) | USC Thread | Roller Guide Part Number | Duct Range I.D. (in) |
|-----------------------------------|------------|--------------------------|----------------------|
| 3/16                              | #12-24     | 08037430                 | .50 - 1.25           |
| 1/4                               | 5/16-18    | 08037440                 | 1.00 - 2.50          |
| 5/16                              | 3/8-16     | 08037460                 | 1.50 - 6.00          |
| 5/16                              | 3/8-16     | 08037401                 | 2.50 - 6.00          |
| 7/16                              | 3/8-16     | 08037401                 | 2.50 - 6.00          |
| 1/2                               | 3/8-16     | 08037401                 | 3.00 +               |



## Flexible Leader

Helps guide the duct rod around bends, sweeps, and duct misalignments.

| Rod Dia., in (mm) | 3/16 (5) | 1/4 (6)  | 5/16 (8) | 7/16 (11) | 1/2 (13) |
|-------------------|----------|----------|----------|-----------|----------|
| USC Thread        | #12-24   | 5/16-18  | 3/8-16   | 3/8-16    | 3/8-16   |
| Flexible Leader   | 08033423 | 08033443 | 08037538 | 08037538  | 08037538 |



## Swivel Coupling

Used to connect two duct rods pushed into the conduit from the same end. Used when one length of duct rod is not long enough for the full conduit run. Also used as a rotating swivel when pulling wire or rope with the Tapered Head or Mini-Harness.


| Rod Dia., in (mm) | 3/16 (5) | 1/4 (6)  | 5/16 (8) | 7/16 (11) | 1/2 (13) |
|-------------------|----------|----------|----------|-----------|----------|
| USC Thread        | #12-24   | 5/16-18  | 3/8-16   | 3/8-16    | 3/8-16   |
| Female/Female     | 08033470 | 08033459 | -        | -         | -        |
| Male/Female       | 08033422 | 08033442 | 08036800 | 08036800  | 08036800 |



## Threaded End Fittings

Use as a replacement to the factory installed end fittings if the end fitting breaks off or if the duct rod breaks close to the end of the rod. Installation instructions are included with the end fittings. Epoxy is required for installation and is ordered separately.

| Rod Dia., in (mm) | 3/16 (5)  | 1/4 (6)   | 5/16 (8)  | 7/16 (11) | 1/2 (13)  |
|-------------------|-----------|-----------|-----------|-----------|-----------|
| USC Thread        | #12-24    | 5/16-18   | 3/8-16    | 3/8-16    | 3/8-16    |
| Male              | 08033420K | 08033440K | 08036307K | 08036303K | 08036341K |
| Female            | -         | -         | 08036306K | 08036304K | 08036342K |

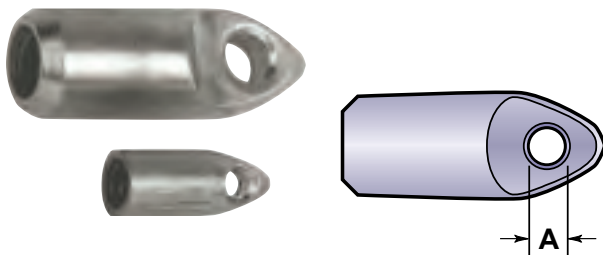

## Tapered Head

Attaches to the end fitting on the duct rod. Guides duct rod through the conduit and allows a pull line (diameter A) to be attached to the duct rod. Comes standard with each of the duct rodders.

| Rod Dia., in (mm) | 3/16 (5) | 1/4 (6)  | 5/16 (8) | 7/16 (11) | 1/2 (13) |
|-------------------|----------|----------|----------|-----------|----------|
| USC Thread        | #12-24   | 5/16-18  | 3/8-16   | 3/8-16    | 3/8-16   |
| Tapered Head      | 08033421 | 08033441 | 08038400 | 08038400  | 08038400 |
| Diameter A        | .156 (4) | .156 (4) | .281 (7) | .281 (7)  | .281 (7) |