



RUNNING LINE TENSIO METER



POWER CABLE INSTALLATION

Running Line Tensiometer, CableGlider HD

Measures loads of 0 to 12,000 lbs. (0 to 53,379 N) with an accuracy of ± 600 lbs. (2,669 N).

Units comes standard with the following:

- Mechanical Sensing Unit
- ECB with these standard features:
 - o Large LED readout
 - o Paperless recorder with Trend Display, Compact Flash Drive™ with 64MB Flash Card
 - o USB Interface
- Load Cell and Cord
- Mounting Hardware
- Card Reader and Software

NOTE: For recalibrating, please call 1-800-533-2077, for RMA.

Part Number	Description
08677360	110 Volt RLT for CableGlider HD w/chart recorder
08677365	110 Volt RLT for CableGlider HD w/chart recorder and nylon rollers



Replacement Mechanical Sensing Units

Part Number	Description
08677373	Mechanical Sensing Unit for STD
08677374	Mechanical Sensing Unit for HD

Remote Mount Stand for Mechanical Sensing Unit

Required for use of the Running Line Tensiometer when the power pack is not mounted to the standard frame, such as when floor-mounted (pg. 53).

Part Number	Description
08677385	Remote Mount Stand for Mechanical Sensing Unit

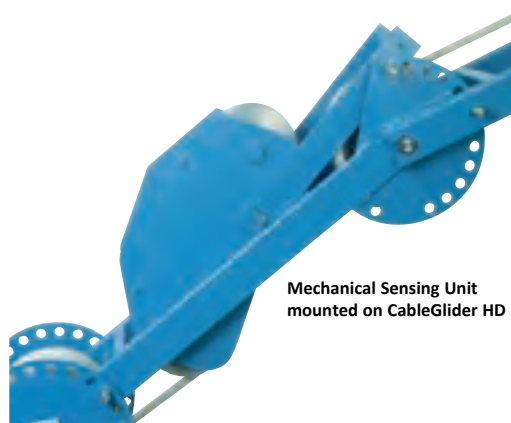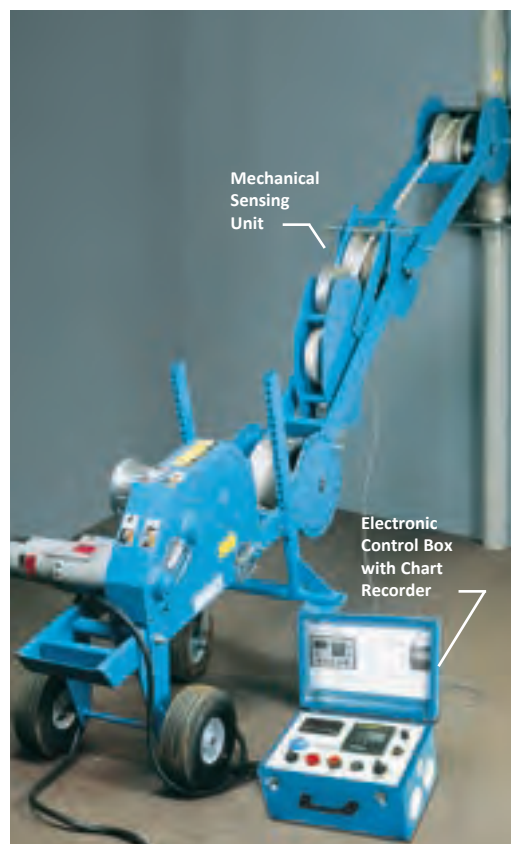

Running Line Tensiometer
Electronic Control Box



Paperless Chart Recorder with Flash
Drive and USB Interface