




# DUCT RODDER ACCESSORIES

5/16" (8mm) - 1/2" (13mm)

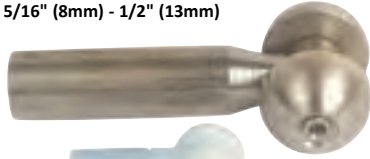

3/16" (5mm) - 1/4" (6mm)



## Roller Guide

Helps guide the duct rod around bends, sweeps, and duct misalignments. Also used when the conduit is already occupied by other cables.

US Duct Rodders Rod Diameter (in)	USC Thread	Roller Guide Part Number	Duct Range I.D. (in)
3/16	#12-24	08037430	.50 - 1.25
1/4	5/16-18	08037440	1.00 - 2.50
5/16	3/8-16	08037460	1.50 - 6.00
5/16	3/8-16	08037401	2.50 - 6.00
7/16	3/8-16	08037401	2.50 - 6.00
1/2	3/8-16	08037401	3.00 +



## Flexible Leader

Helps guide the duct rod around bends, sweeps, and duct misalignments.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	1/2 (13)
USC Thread	#12-24	5/16-18	3/8-16	3/8-16	3/8-16
Flexible Leader	08033423	08033443	08037538	08037538	08037538



## Swivel Coupling

Used to connect two duct rods pushed into the conduit from the same end. Used when one length of duct rod is not long enough for the full conduit run. Also used as a rotating swivel when pulling wire or rope with the Tapered Head or Mini-Harness.


Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	1/2 (13)
USC Thread	#12-24	5/16-18	3/8-16	3/8-16	3/8-16
Female/Female	08033470	08033459	-	-	-
Male/Female	08033422	08033442	08036800	08036800	08036800



## Threaded End Fittings

Use as a replacement to the factory installed end fittings if the end fitting breaks off or if the duct rod breaks close to the end of the rod. Installation instructions are included with the end fittings. Epoxy is required for installation and is ordered separately.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	1/2 (13)
USC Thread	#12-24	5/16-18	3/8-16	3/8-16	3/8-16
Male	08033420K	08033440K	08036307K	08036303K	08036341K
Female	-	-	08036306K	08036304K	08036342K

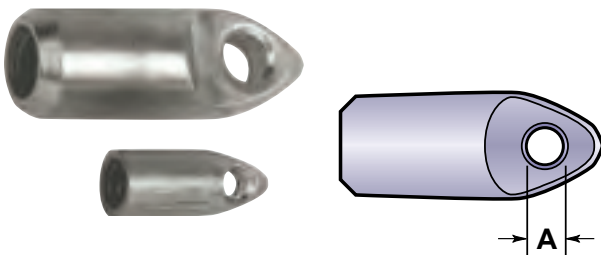

## Tapered Head

Attaches to the end fitting on the duct rod. Guides duct rod through the conduit and allows a pull line (diameter A) to be attached to the duct rod. Comes standard with each of the duct rodders.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	1/2 (13)
USC Thread	#12-24	5/16-18	3/8-16	3/8-16	3/8-16
Tapered Head	08033421	08033441	08038400	08038400	08038400
Diameter A	.156 (4)	.156 (4)	.281 (7)	.281 (7)	.281 (7)