

ELECTROFUSION  
EQUAL TEE

MOLDED  
FOR YOUR  
INDUSTRY

IntegriFuse™



 **INTEGRITY**  
Fusion Products, Inc.

TOLL FREE 1-888-770-6330

INTEGRITYFUSION.COM


# The difference MOLDED Makes

Integrity Fusion continues to be the market leader in electrofusion fittings, by offering innovative solutions to all of your fusible needs. Our IntegriFuse brand EF Equal Tees are molded in sizes up through 8" IPS and fully pressure rated to SDR 11. The EF Tees are manufactured with electrofusion outlets on the mainline, and butt fusion on the outlet, allowing the installer several options when connecting the lateral line. Electrofusion Tees offer a convenient alternative to traditional butt fusion when dealing with tight spaces, repairs, vertical applications, or any project when difficult to utilize butt fusion equipment.

IntegriFuse EF Fittings are manufactured from the highest quality black high density bimodal polyethylene copolymer resin designed for use in, but not limited to, potable water, natural gas, industrial, landfill, oil & gas, and mining applications.

All IntegriFuse fittings meet ASTM D2513 & ASTM D3261 (where applicable)

Integrity Fusion Products, Inc.  
270 Parkade Court  
Peachtree City, GA 30269  
P: 1-888-770-6330 • P: 770-632-7530  
F: 770-632-7540  
E: [Info@IntegrityFusion.com](mailto:Info@IntegrityFusion.com)

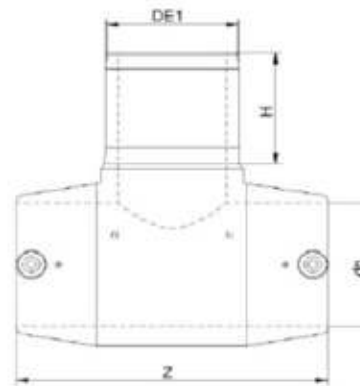

## Electrofusion Equal Tee

Nominal Size	OD	H	Z	Unit Weight	Item Code
¾" IPS	1.050"	1.5"	4.3"	0.3 lbs.	200600
1 ¼" IPS	1.660"	1.9"	5.5"	0.4 lbs.	200603
1 ½" IPS	1.900"	1.9"	6.4"	0.7 lbs.	200604\
2" IPS	2.375"	2.7"	6.9"	1.3 lbs.	200654
3" IPS	3.500"	3.2"	8.2"	3.3 lbs.	200655
4" IPS	4.500"	3.5"	10.4"	5.9 lbs.	200656
6" IPS	6.625"	4.0"	13.2"	17.9 lbs.	200657
8" IPS	8.625"	4.4"	15.5"	43.9 lbs.	200658

Water - 200 PSI (ASTM) / 232 PSI (ISO) | Gas - 100 PSI @ 73° F Sustainable Maximum Operating Pressure  
Designed for use on IPS SDR 11 to SDR 17 HDPE Pipe

Manufactured in accordance to ASTM 1055

Manufactured with resin having a material designation code of PE3408 / PE4710 / PE100 resin to comply to ASTM D3350. AWWA C901/901 NSF/ANSI 61

