



INNERDUCT PULLING PRODUCTS




See compatibility chart on page 43 to determine what Innerduct Pulling Eyes work with various standard innerduct sizes.

Fixed Head Innerduct Pulling Eye

Tapered buttress threads thread into the innerduct for maximum pulling strength. These eyes connect directly to a Condux swivel (see page 24). When properly sized and installed, these eyes will not pull out of the innerduct until the pulling tensions have greatly exceeded the maximum pulling tensions recommended by the innerduct manufacturers.

NOTE: To determine correct pulling eye size, obtain the actual innerduct inside diameter (I.D.). The I.D. measurement must be greater than dimension A and smaller than dimension B.

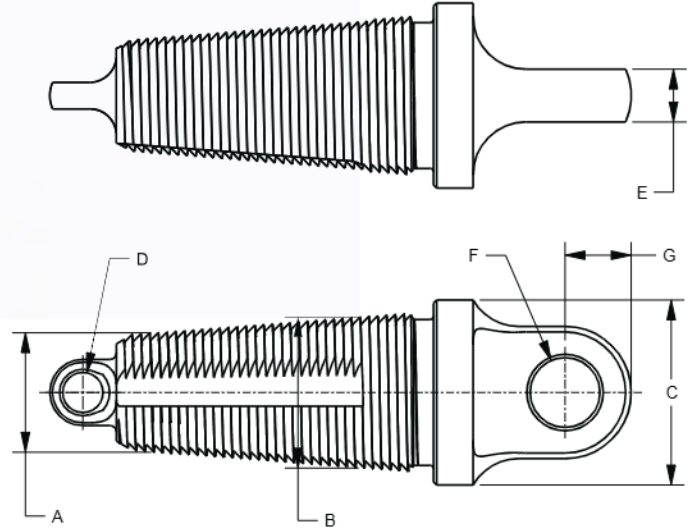

Part Number	Nominal Size	Innerduct ID Range		Max OD C		Hole Diameter D		Tang Thickness E		Tang Hole Diameter F		Tang Hole Location G	
	(IN.)	A - B (IN.)	A - B (MM)	(IN.)	MM	(IN.)	MM	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08914110 *	0.75	.73 - .94	19 - 24	1.25	32	.25	6	.38	10	.50	13	.50	13
08914122 *	1.00	.97 - 1.14	25 - 29	1.38	35	.25	6	.38	10	.50	13	.50	13
08914130 *	1.25	1.16 - 1.43	29 - 36	1.75	44	.38	10	.50	13	.66	17	.63	16
08914142 *	1.50	1.50 - 1.67	38 - 42	2.00	51	.38	10	.50	13	.66	17	.63	16
08914150 **	1.75	1.72 - 1.85	44 - 47	2.25	57	.38	10	.50	13	.66	17	.75	19
08914162 **	2.00	1.88 - 2.07	48 - 53	2.50	64	.38	10	.50	13	.81	21	.75	19

* Compatible with 1/4"-3/8" Threaded Chain Connectors and Condux Swivels 08080912, 08080913, 08210012, and 08210014

** Compatible with 3/16"-1/2" Threaded Chain Connectors and Condux Swivels 08210012 and 08210014