
Reusable Power Pulling Eyes, Standard Head

The Standard Head Power Pulling Eyes are an excellent alternative when pulling multiple cables into a single conduit. Single conductors can be attached to a Condux Multiple Pulling Harness with links or with Condux swivels. Installation is then simplified to a single pull of one assembly. Each Standard Power Pulling Eye includes an eye socket, sleeve nut, and plug.



For swivel compatibility, refer to compatibility chart on page 27.

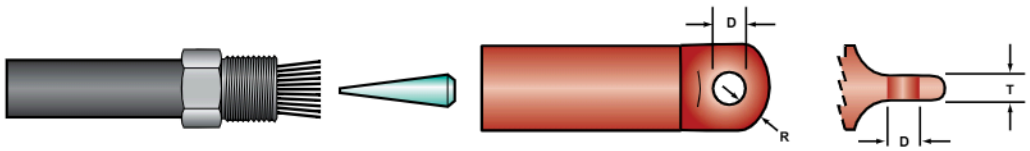

	Cable Size	Color	Maximum Conductor Diameter		Max Eye OD		Hole Diameter D		Eye Thickness T		Eye Width R		Replacement Plug Part Number	Working Load	
Part Number			(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)		LBS	KN
08918455	6000 kcmil	Orange	2.785	71	4.50	114	1.31	33	1.50	38	1.22	31	08918423	59,000	262.4
08918440	5000 kcmil	Blue	2.500	64	4.50	114	1.31	33	1.50	38	1.22	31	08918423	59,000	262.4
08918450	4000 kcmil	Yellow	2.220	56	4.00	102	1.25	32	1.50	38	1.25	32	08918423	42,500	189.0
08918445	3500 kcmil	Black	2.160	55	4.00	102	1.25	32	1.50	38	1.25	32	08918423	42,500	189.0
08918430	3000 kcmil	Gray	2.030	52	4.00	102	0.88	22	.94	24	.81	21	08918423	26,000	115.6
08918585	2750 kcmil	White	1.964	50	4.00	102	0.88	22	.94	24	.81	21	08918423	26,000	115.6
08918580	2500 kcmil	Green	1.923	49	4.00	102	0.88	22	.94	24	.81	21	08918123	26,000	115.6
08918575	2000 kcmil	Red	1.700	43	2.63	67	1.00	25	.88	22	.75	19	08918023	25,000	111.2
08918570	1750 kcmil	Yellow	1.625	41	2.63	67	1.00	25	.88	22	.75	19	08917723	25,000	111.2
08918565	1500 kcmil	Black	1.469	37	2.63	67	1.00	25	.88	22	.75	19	08917923	25,000	111.2
08918560	1250 kcmil	Blue	1.328	34	2.63	67	1.00	25	.88	22	.75	19	08917823	25,000	111.2
08918555	1000 kcmil	Orange	1.203	31	2.00	51	0.69	17	.63	16	.59	15	08917123	13,500	60.0
08918550	750 kcmil	Brown	1.031	26	2.00	51	0.69	17	.63	16	.59	15	08917223	13,500	60.0
08918545	700 kcmil	Gray	1.00	25	2.00	51	0.69	17	.63	16	.59	15	08917323	13,500	60.0
08918540	600 kcmil	Green	.906	23	2.00	51	0.69	17	.63	16	.59	15	08918223	13,500	60.0
08918535	500 kcmil	Yellow	.843	21	1.88	48	0.69	17	.50	13	.59	15	08917423	8,500	37.8
08918530	400 kcmil	Black	.750	19	1.88	48	0.69	17	.50	13	.59	15	08918323	8,500	37.8
08918525	350 kcmil	White	.718	18	1.88	48	0.69	17	.50	13	.59	15	08917523	8,500	37.8
08918520	250 kcmil	Blue	.640	16	1.25	32	0.50	13	.50	13	.38	10	08960323	6,500	28.9
08918515	4/0 AWG	Green	.531	13	1.25	32	0.50	13	.50	13	.38	10	08960423	6,500	28.9
08918510	3/0 AWG	Orange	.475	12	1.25	32	0.50	13	.50	13	.38	10	08960923	6,500	28.9
08918505	2/0 AWG	Black	.431	11	1.25	32	0.50	13	.50	13	.38	10	08960823	6,500	28.9
08918500	1/0 AWG	Red	.390	10	1.25	32	0.50	13	.50	13	.38	10	08960523	6,500	28.9

3:1 Safety Factor

! Will not work on flat aluminum stranded conductor.