


CATCHBLOCK SYSTEM

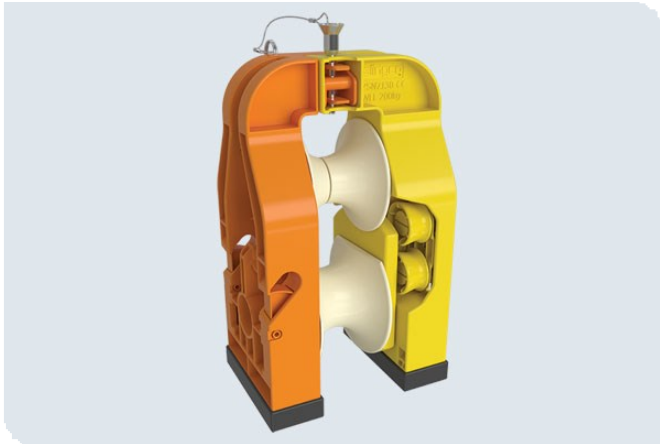

KEY FEATURES

- ✓ Removes the need to close down essential infrastructure for conductor repairs or in the event of an emergency
- ✓ Cuts down the need for scaffolding; reduces accident risk
- ✓ Lightweight, robust, weatherproof and easy to deploy
- ✓ Twin rope system allows for recovery and redeployment
- ✓ Flexible - CatchBlock isn't specific to a single tug design
- ✓ High conductor range, including the ability to allow mid-span joints/repair sleeves to pass through safely
- ✓ Blocks can be connected for use on multiple bundle conductor systems

The challenges faced by the OHL industry due to the growing number of infrastructure projects built beneath existing transmission and distribution networks - alongside increasingly stringent OHL regulations - can make maintenance costly, time-consuming and challenging. Lightweight, robust and easy to deploy, CatchBlock helps overcome these issues, increasing efficiency and reducing costs.

REDUCED DISRUPTION

CatchBlock is an innovative overhead line (OHL) catenary roller system. Designed to deploy a twin-rope system, it allows the recovery and redeployment of broken conductors without the need to take possession of road/rail or client/third party property or infrastructure.

REDUCED ACCIDENT RISK

CatchBlock significantly reduces the need for erection and dismantling of scaffolding - cutting down the risk of accidents and harm to site workers.

REDUCED STRINGING COSTS

The reduced need for scaffolding, ease of deployment, and the ability to recover and redeploy, means fewer man hours and faster, more efficient operation ...all of which combine to deliver substantially reduced costs.

TRUSTED INNOVATION, OUTSTANDING SUPPORT, BESPOKE SOFTWARE

In addition to our complete engineering support service, we offer bespoke software for the CatchBlock system to replace spreadsheet calculations. Intuitive and easy to use, this software needs only limited training in order for site staff to complete regulatory checks.



GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au

CATCHBLOCK SYSTEM

The CatchBlock system has been rigorously trialled and tested. At no point has there been the need to take out possession orders for property or infrastructure, even with a failed conductor.

[Download CatchBlock brochure](#)

System	Slingco Part No.
CatchBlock OHL catenary roller	ZSN7130

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions


The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-5%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia **Sales:** +61 3 8840 6556

GET IN TOUCH

 +61 3 8840 6556

 sales@slingcoaustralia.com.au