


# HEAVY DUTY HOSE RESTRAINT SOCKS



## KEY FEATURES

- ✓ Prevents whipping from detached pressure hoses
- ✓ Threaded bolt fitting
- ✓ Double, Triple and Multiweave options
- ✓ Double reinforced eyes
- ✓ High strength options available

Safety restraining system designed to prevent whipping in the event of a pressurised hose becoming detached from its fitting.

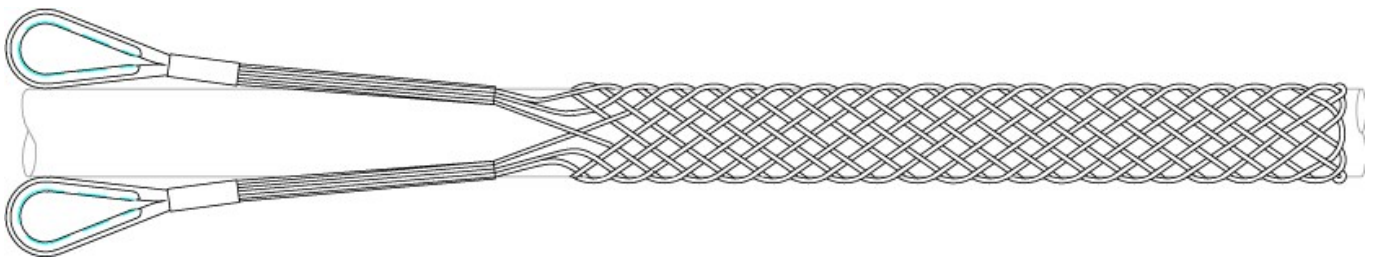

### Double Thimble Eye - Galvanised Steel

| Slingco Part No. | Eye type    | Range (mm) | Range (in) | Lattice Length (mm) | Lattice Length (in) | Lattice Weave | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|-------------|------------|------------|---------------------|---------------------|---------------|-------------------------|-------------------------|
| ZCS5363          | Thimble eye | 25 - 38    | 1.0 - 1.5  | 660                 | 26                  | Double        | 4,911                   | 11,000                  |
| ZCS5364          | Thimble eye | 38 - 63    | 1.5 - 2.5  | 1,016               | 40                  | Double        | 8,928                   | 20,000                  |
| ZCS5365          | Thimble eye | 63 - 89    | 2.5 - 3.5  | 1,067               | 42                  | Double        | 9,821                   | 22,000                  |
| ZCS5366          | Thimble eye | 89 - 114   | 3.5 - 4.5  | 1,118               | 44                  | Double        | 12,053                  | 27,000                  |
| ZCS5367          | Thimble eye | 114 - 140  | 4.5 - 5.5  | 1,219               | 48                  | Double        | 13,839                  | 31,000                  |
| ZCS6012          | Thimble eye | 140 - 180  | 5.5 - 7.0  | 1,524               | 60                  | Double        | 22,685                  | 50,000                  |



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

## GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au

# HEAVY DUTY HOSE RESTRAINT SOCKS

## Double Thimble Eye - 316 Stainless Steel

| Slingco Part No. | Eye type    | Range (mm) | Range (in) | Lattice Length (mm) | Lattice Length (in) | Lattice Weave | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|-------------|------------|------------|---------------------|---------------------|---------------|-------------------------|-------------------------|
| ZCS5650          | Thimble eye | 25 - 38    | 1.0 - 1.5  | 660                 | 26                  | Double        | 3,437                   | 7,700                   |
| ZCS5651          | Thimble eye | 38 - 63    | 1.5 - 2.5  | 1,016               | 40                  | Double        | 6,250                   | 14,000                  |
| ZCS5652          | Thimble eye | 63 - 89    | 2.5 - 3.5  | 1,067               | 42                  | Double        | 6,874                   | 15,400                  |
| ZCS5653          | Thimble eye | 89 - 114   | 3.5 - 4.5  | 1,118               | 44                  | Double        | 8,437                   | 18,900                  |
| ZCS5654          | Thimble eye | 114 - 140  | 4.5 - 5.5  | 1,219               | 48                  | Double        | 9,687                   | 21,700                  |
| ZCS6000          | Thimble eye | 140 - 180  | 5.5 - 7.0  | 1,524               | 60                  | Double        | 15,880                  | 35,000                  |

## Double Eye Multiweave - Max Strength - 316 Stainless Steel

| Slingco Part No. | Eye type    | Range (mm) | Range (in)  | Lattice Length (mm) | Lattice Length (in) | Lattice Weave | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|-------------|------------|-------------|---------------------|---------------------|---------------|-------------------------|-------------------------|
| ZCS3995          | Thimble eye | 29 - 40    | 1.14 - 1.57 | 1,270               | 50                  | Double        | 15,625                  | 35,000                  |
| ZCS3295          | Flex eye    | 70 - 87    | 2.75 - 3.44 | 1,460               | 58                  | Multiple      | 22,230                  | 49,000                  |
| ZCS3254          | Flex eye    | 76 - 89    | 3.00 - 3.50 | 1,460               | 58                  | Multiple      | 17,785                  | 39,200                  |
| ZCS6004          | Flex eye    | 89 - 120   | 3.50 - 4.75 | 1,460               | 58                  | Multiple      | 22,320                  | 50,000                  |

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-5%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

### GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au