


NO - NON-METALLIC (ARAMID) OFFSET EYE CABLE SOCK



KEY FEATURES

- ✓ Continuous weave configuration
- ✓ No fraying wires
- ✓ Lighter and safer to handle
- ✓ Longer life

Ideal for fibre optic applications, offshore or for a multitude of uses in the electrical industry; dramatically improved weight to break ratio. Slingco's non-metallic pulling socks are made of a high-strength, non-metallic aramid fibre, with UV protective coating; they are suitable for pulling both single cable and cable bundles. These woven mesh socks offer a non-metallic alternative to steel. Non-metallic material is easy to work with even without gloves.

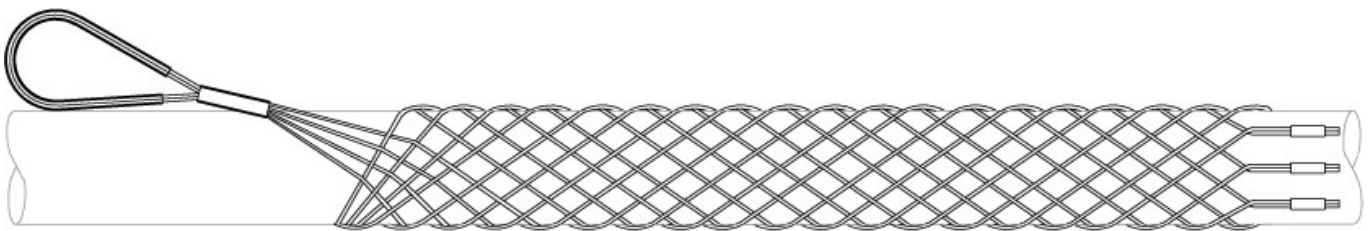

Single Offset Eye Single Weave Non-Metallic Sock

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS2810	0.38 - 0.75	10 - 20	21	535	2,460	1,115
ZCS2811	0.75 - 1.25	20 - 30	21	535	3,580	1,620
ZCS2921	1.00 - 1.50	25 - 38	23	584	3,580	1,620
ZCS2812	1.25 - 1.50	30 - 40	25	635	4,920	2,230
ZCS2813	1.50 - 2.00	40 - 50	21	535	5,820	2,640

Single Offset Eye Double Weave Non-Metallic Sock

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS09342	0.5 - 1.00	13 - 25	39	990	8,093	3,671
ZCS2814	1.25 - 1.50	30 - 38	34	864	9,860	4,470
ZCS2815	1.50 - 2.00	38 - 50	25	635	11,880	5,390
ZCS2816	2.00 - 2.50	50 - 65	25	635	15,900	7,210
ZCS2817	2.50 - 3.00	65 - 76	26	667	15,900	7,210
ZCS2818	3.00 - 4.00	76 - 102	34	864	15,900	7,210

Single Offset Eye Extended Eye 12" Non-Metallic Sock

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS7053	0.50 - 0.63	13 - 16	24	610	800	363
ZCS7054	0.63 - 0.74	16 - 19	24	610	1,000	454
ZCS7055	0.75 - 1.00	19 - 25	24	610	1,200	544
ZCS7056	1.00 - 1.25	25 - 32	24	610	1,200	544



GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au

NO - NON-METALLIC (ARAMID) OFFSET EYE CABLE SOCK

Single Offset Eye Lace Up Non-Metallic Sock

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS09323	0.63 - 1.00		59		13,000	
ZCS10476	3.00 - 3.50		30		5,000	

SINGLE OFFSET EYE LACE UP NON-METALLIC SOCK

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
		65 - 76		1,499		5,896
		76 - 102		762		2,268

Double Offset Eye Non-Metallic Sock

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS8176	2.50 - 3.00	65 - 76	39	991	8,000	3,629
ZCS09959	2.50 - 3.00	65 - 76	36	914	9,000	4,082
ZCS6823	3.00 - 4.00	76 - 102	33	838	9,000	4,082

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions


The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-5%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia **Sales:** +61 3 8840 6556

GET IN TOUCH

 +61 3 8840 6556

 sales@slingcoaustralia.com.au