


SPLICING GRIPS - ROTATING SWIVEL LINK



KEY FEATURES

- ✓ Suitable for drilling rigging systems
- ✓ Link opens for easy installation and adjustment
- ✓ Can be used with different sized grips on each side

Slingco Rotating Swivel Link Grips are perfect for stringing replacement wire and cable on equipment and in drilling or rigging systems. Not recommended for use in overhead stringing applications. Use the existing cable as a pull wire to string the replacement cable. These grips are available with differently sized grips for each side. Call for assistance in selecting the proper grip. Link opens for easy installation and adjustment. Made of Galvanized Steel.

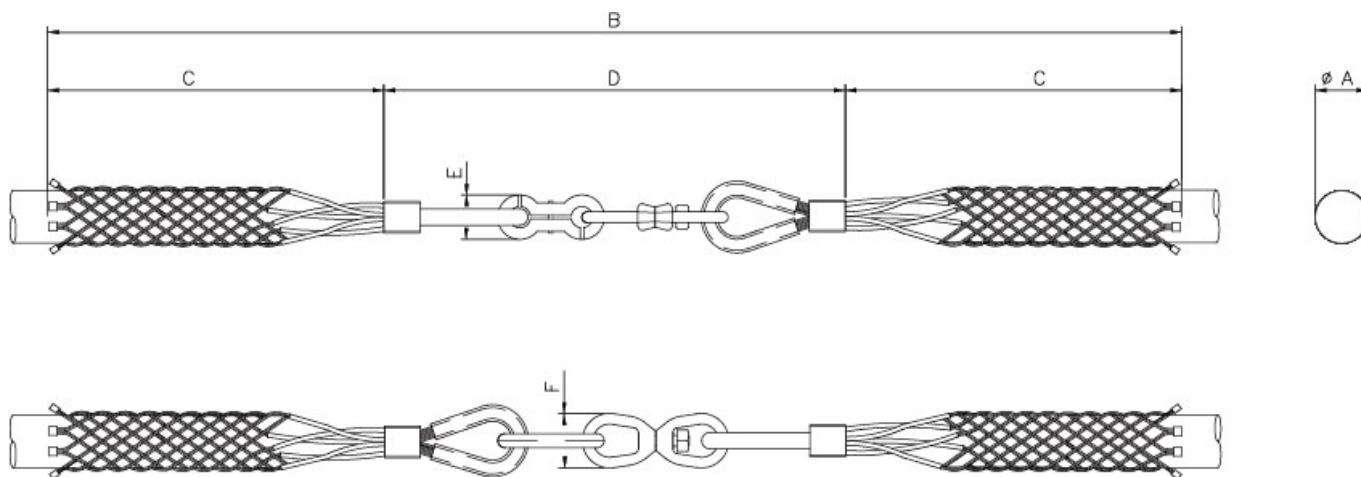

L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556
sales@slingcoaustralia.com.au

SPLICING GRIPS - ROTATING SWIVEL LINK

Slingco Part No.	Range (mm)	Range (in)	Ø A Length (mm)	Ø A Length (in)	B Length (mm)	B Length (in)	C Length (mm)	C Length (in)	D Length (mm)	D Length (in)	E Length (mm)	E Length (in)	F Length (mm)	F Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS3493	6 - 13	0.25 - 0.50	9.5	0.37	2,542	100.0	1,127	44.3	288	11.3	22	0.87	32	1.25	1,089	2,400
ZCS3494	13 - 25	0.50 - 1.00	19	0.75	2,621	103.2	1,160	45.7	301	11.8	35	1.38	32	1.25	1,599	3,526
ZCS3495	25 - 38	1.00 - 1.50	32	1.25	2,654	104.5	1,160	45.7	334	13.1	41	1.61	41	1.61	2,300	5,070
ZCS3496	38 - 51	1.50 - 2.00	44.5	1.75	2,673	105.2	1,160	45.7	353	13.9	41	1.61	51	2.0	3,629	8,000
ZCS3497	51 - 70	2.00 - 2.75	60.5	2.38	2,673	105.2	1,160	45.7	353	13.9	41	1.61	51	2.0	4,537	10,000
ZCS3498	70 - 90	2.75 - 3.50	80	3.15	2,673	105.2	1,160	45.7	353	13.9	41	1.61	51	2.0	4,537	10,000
ZCS3499	89 - 108	3.50 - 4.25	98.5	3.87	2,753	108.4	1,200	45.7	353	13.9	41	1.61	51	2.0	4,537	10,000

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-5%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au