




Solid Braid Polyester

Stays firm and round over pulleys, yet flexible. 10% lower elongation at break than nylon solid braids. Excellent abrasion resistance. Meets Federal Specification MIL-C-43256. Available in colors.

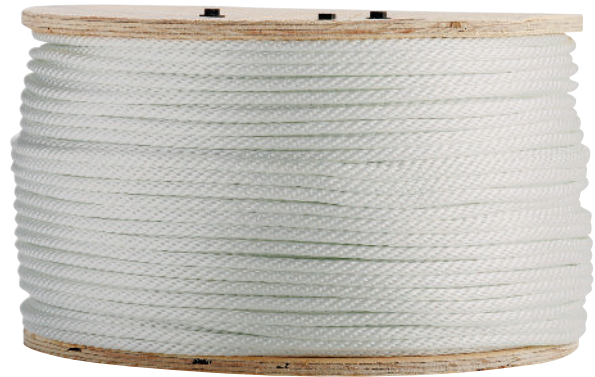

Solid Braid Polyester

Part Number	Size	Diameter (in.)	Length (ft.)	Minimum Break Strength (lbs.)	Approximate Density (lbs./100 ft.)	Approximate Package Weight (lbs.)
SBPS041000	#4	1/8	1,000	400	0.47	4.7
SBPS043000	#4	1/8	3,000	400	0.47	14.1
SBPS051000	#5	5/32	1,000	550	0.58	5.8
SBPS053000	#5	5/32	3,000	550	0.58	17.4
SBPS061000	#6	3/16	1,000	820	0.85	8.5
SBPS063000	#6	3/16	3,000	820	0.85	25.5
SBPS081000	#8	1/4	1,000	1,300	1.63	16.3
SBPS101000	#10	5/16	1,000	1,750	2.80	28.0
SBPS120500	#12	3/8	500	2,700	3.85	19.3
SBPS121000	#12	3/8	1,000	2,700	3.85	38.5
SBPS160500	#16	1/2	500	4,500	6.80	34.0
SBPS161000	#16	1/2	1,000	4,500	6.80	68.0

