TRANSITION FITTINGS

STANDARD

NPT Transition Fitting Female

Integri Fuse



INTEGRITYFUSION.COM

1

TRANSITIONING TO THE NEXT LEVEL

Integrity offers a full line of HDPE transition fittings to meet your needs; whether for water, oil, or any other transition application.


We offer a full line of Standard transition fittings in Male and Female NPT Threads in epoxy coated carbon steel, 304SS, and 316SS. We also offer standard cut groove transitions in epoxy coated carbon steel.

In addition, Integrity Fusion offers an impressive line of Heavy Duty transitions which are more durable for heavier duty applications. Threaded, Grooved, and Weld End are all available.

IntegriFuse fittings are manufactured for use in, but not limited to, potable water, oilfield, industrial, landfill, and mining applications.

All IntegriFuse Fittings meet ASTM-D3261 Requirements and are manufactured with domestic pipe having a material designation code of PE 3408, PE 3608, PE 4710, and PE 100.

Integrity Fusion Standard Threaded Transitions meet All IntegriFuse fittings meet AWWA C-901/C-906, NSF/ANSI/ CAN-61, and NSF/ANSI-372(where applicable).

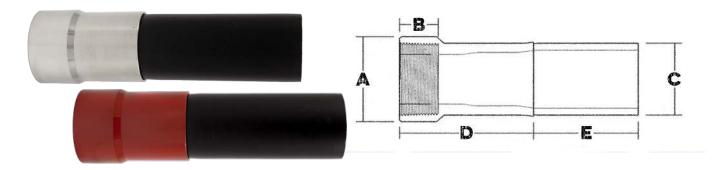

SDR 11 (Standard Dimension Ratio) 200 PSI (Working Pressure at 73.4° F) **Female (FIPT) NPT Transitions**

NOMINAL SIZE	A	В	С	D	E	EPOXY COATED Carbon	304 Stainless Steel Steel	316 Stainless
3⁄4″ IPS	1.240″	0.70″	1.050″	2.20″	5.80″	400502	400500	400501
1" IPS	1.485″	0.91″	1.315″	2.60″	5.40″	400507	400503	400505
1 ¼″ IPS	1.900″	0.89″	1.660″	3.40″	4.60″	400513	400509	400511
1 ½″ IPS	2.250″	0.85″	1.900″	3.40″	4.60″	400516	400515	400615
2" IPS	2.750″	1.00″	2.375″	3.40″	4.60″	400523	400517	400520
3″ IPS	4.144″	1.62″	3.500″	4.38″	3.62″	400532	400526	400529
4″ IPS	5.160″	1.88″	4.500″	4.62″	7.38″	400541	400535	400538

SDR 9 (Standard Dimension Ratio) 255 PSI (Working Pressure at 73.4° F)

NOMINAL SIZE	A	В	С	D	E	EPOXY COATED Carbon	304 Stainless Steel Steel	316 Stainless
1″IPS	1.485″	0.91″	1.315″	2.60″	5.40″	400508	400504	400506
1 ¼″ IPS	1.900″	0.89″	1.660″	3.40″	4.60″	400514	400510	400512
2"IPS	2.750″	1.00″	2.375″	3.40″	4.60″	400525	400519	400522
3″IPS	4.144″	1.62″	3.500″	4.38″	3.62″	400534	400528	400531
4″IPS	5.160″	1.88″	4.500″	4.62″	7.38″	400543	400537	400540

Note: These transition fittings are not rated for gas applications.

Integrity Fusion Products, Inc. 270 Parkade Court . Peachtree City, GA 30269 P: 1-888-770-6330 • P: 770-632-7530 • F: 770-632-7540 E: Info@IntegrityFusion.com



TRANSITIONING TO THE NEXT LEVEL

Integrity offers a full line of HDPE transition fittings to meet your needs; whether for water, oil, or any other transition application.


We offer a full line of Standard transition fittings in Male and Female NPT Threads in epoxy coated carbon steel, 304SS, and 316SS. We also offer standard cut groove transitions in epoxy coated carbon steel.

In addition, Integrity Fusion offers an impressive line of Heavy Duty transitions which are more durable for heavier duty applications. Threaded, Grooved, and Weld End are all available.

IntegriFuse fittings are manufactured for use in, but not limited to, potable water, oilfield, industrial, landfill, and mining applications.

All IntegriFuse Fittings meet ASTM-D3261 Requirements and are manufactured with domestic pipe having a material designation code of PE 3408, PE 3608, PE 4710, and PE 100.

Integrity Fusion Standard Threaded Transitions meet All IntegriFuse fittings meet AWWA C-901/C-906, NSF/ANSI/ CAN-61, and NSF/ANSI-372(where applicable).

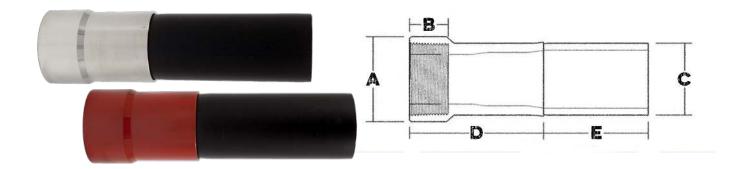

SDR 7 (Standard Dimension Ratio) 335 PSI (Working Pressure at 73.4° F)

NOMINAL SIZE	A	В	С	D	E	EPOXY COATED Carbon	304 Stainless Steel	316 Stainless Steel
1" IPS	1.485″	0.91″	1.315″	2.60″	5.40″	400642	400640	400641
1 ¼″ IPS	1.900″	0.89″	1.660″	3.40″	4.60″	400645	400643	400644
2" IPS	2.750″	1.00″	2.375″	3.40″	4.60″	400524	400518	400521
3″IPS	4.144″	1.62″	3.500″	4.38″	3.62″	400533	400527	400530
4″ IPS	5.160″	1.88″	4.500″	4.62″	7.38″	400542	400536	400539

Note: These transition fittings are not rated for gas applications.

Integrity Fusion Products, Inc. 270 Parkade Court . Peachtree City, GA 30269 P: 1-888-770-6330 • P: 770-632-7530 • F: 770-632-7540 E: Info@IntegrityFusion.com

