

## Water Blocking Utility Locating System


### Description:

Water blocking reinforced tracer wire for the TRACE-SAFE® utility locating system. Double insulated metallic conductor enables reliable and accurate locating of all-dielectric cables, gas lines, sewer lines or water pipes.

### Features & Benefits

### Properties

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• High strength</li> <li>• Lightweight and flexible</li> </ul>                                    | <ul style="list-style-type: none"> <li>• Break strengths: 1800 and 610 lbs. (818/181 kg) nominal</li> <li>• RT1800 weight = 20 lbs. per 1,000 feet (29 kg/km)</li> </ul>      |
| <ul style="list-style-type: none"> <li>• Sequential footage or meter markings</li> <li>• Passes 3 meter water head test</li> </ul>       | <ul style="list-style-type: none"> <li>• TST600 weight = 11 lbs. per 1,000 feet (16.4 kg/km)</li> <li>• High tenacity polyester fibers with superabsorbent powders</li> </ul> |
| <ul style="list-style-type: none"> <li>• Corrosion-resistant conductor compatible with any locating equipment</li> </ul>                 | <ul style="list-style-type: none"> <li>• Conductor diameter: .0356" nominal (19 AWG) (.9 mm)</li> </ul>   |
| <ul style="list-style-type: none"> <li>• Two high density polyethylene jackets</li> <li>• Abrasion, moisture and UV resistant</li> </ul> | <ul style="list-style-type: none"> <li>• RT1800 outer jacket thickness = .030" (.762 mm)</li> <li>• TST600 outer jacket thickness = .025" (.635 mm)</li> </ul>                |
| <ul style="list-style-type: none"> <li>• Easy and convenient to use</li> <li>• Impact and crush resistant</li> </ul>                     | <ul style="list-style-type: none"> <li>• Inner jacket thickness = .006" (.152 mm)</li> <li>• Conductor tensile strength: 38,500 psi nominal</li> </ul>                        |
| <ul style="list-style-type: none"> <li>• No strip universal connectors ensuring consistent reliable connections every time</li> </ul>    | <ul style="list-style-type: none"> <li>• UL 1581 rated to 600 volts meets CE standards</li> <li>• Dielectric constant 2.29 @ 1Mhz</li> </ul>                                  |

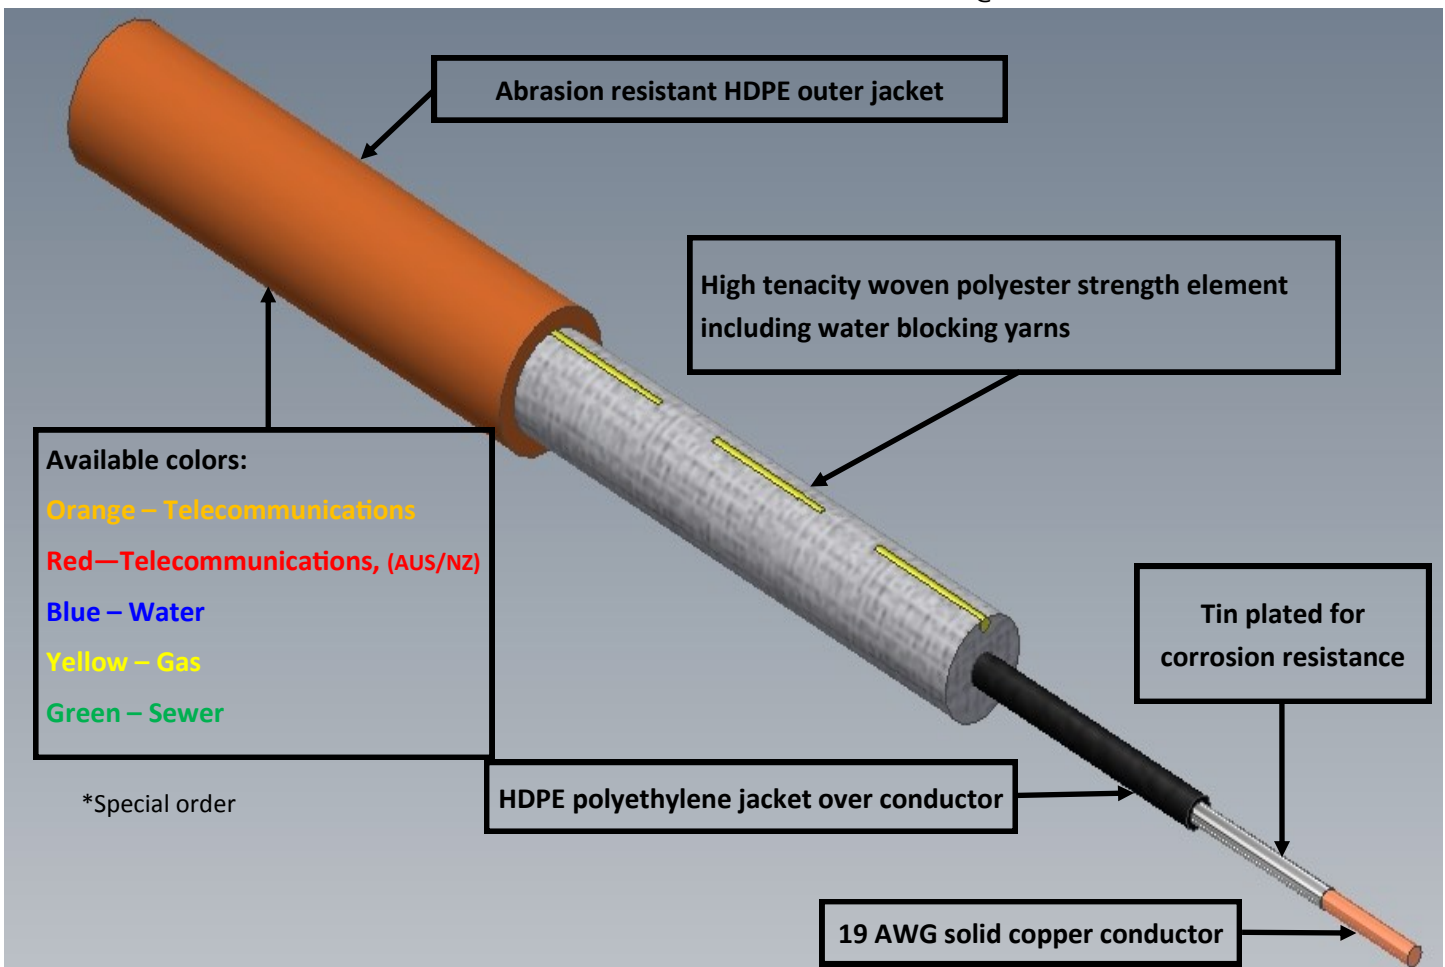

Please see reverse side for additional information

Item	Product	1800 LB Description	Package	Reel Dimensions	Wt. /lbs	Rls. /skid
<b>TELECOMMUNICATIONS</b>						
44087	RT1800W	Orange - TRACE-SAFE	500 ft	Fl. 10.5" x W 7.75"	11	45
42410	RT1800W	Orange - TRACE-SAFE	1,000 ft	Fl. 12" x W 12"	24	36
44088	RT1800W	Orange - TRACE-SAFE	2,500 ft	Fl. 13.25" x W 17"	60	18
<b>GAS TRANSMISSION AND DISTRIBUTION</b>						
44089	RT1801W	Yellow - TRACE-SAFE	500 ft	Fl. 10.5" x W 7.75"	11	45
41741	RT1801W	Yellow - TRACE-SAFE	1,000 ft	Fl. 12" x W 12"	24	36
44092	RT1801W	Yellow - TRACE-SAFE	2,500 ft	Fl. 13.25 x 17"	60	18
<b>WATER TRANSMISSION AND DISTRIBUTION</b>						
44093	RT1802W	Blue - TRACE-SAFE	500 ft	Fl. 10.5 x W 7.75"	11	45
41740	RT1802W	Blue - TRACE-SAFE	1,000 ft	Fl. 12" x W 12"	24	36
44097	RT1802W	Blue - TRACE-SAFE	2,500 ft	Fl. 13.25" x W 17"	60	18
<b>SEWER</b>						
44098	RT1803W	Green - TRACE-SAFE	500 ft	Fl. 10.5 x W 7.75"	11	45
42408	RT1803W	Green - TRACE-SAFE	1,000 ft	Fl. 12" x W 12"	24	36
44099	RT1803W	Green - TRACE-SAFE	2,500 ft	Fl. 13.25" x W 17"	60	18

Item	Product	400 LB Description	Package	Reel Dimensions	Wt. /lbs	Rls. /skid
<b>TELECOMMUNICATIONS</b>						
61859	TST600W	Orange - TRACE-SAFE TRENCH	1,000 ft	Fl. 12 x W 10.25"	12	36
61861	TST600W	Orange - TRACE-SAFE TRENCH	2,500 ft	Fl. 12 x W 10.25"	27	36
62360	TST400W	Orange - TRACE-SAFE TRENCH	5,000 ft	Fl. 12 x W 16.25"	56	18
<b>GAS TRANSMISSION AND DISTRIBUTION</b>						
61873	TST601W	Yellow - TRACE-SAFE TRENCH	1,000 ft	Fl. 12 x W 10.25"	12	36
61875	TST601W	Yellow - TRACE-SAFE TRENCH	2,500 ft	Fl. 12 x W 10.25"	27	36
62361	TST601W	Yellow - TRACE-SAFE TRENCH	5,000 ft	Fl. 12 x W 16.25"	56	18
<b>WATER TRANSMISSION AND DISTRIBUTION</b>						
62244	TST602W	Blue - TRACE-SAFE TRENCH	1,000 ft	Fl. 12 x W 10.25"	12	36
62246	TST602W	Blue - TRACE-SAFE TRENCH	2,500 ft	Fl. 12 x W 10.25"	27	36
62245	TST602W	Blue - TRACE-SAFE TRENCH	5,000 ft	Fl. 12 x W 16.25"	56	18
<b>SEWER</b>						
62358	TST603W	Green - TRACE-SAFE TRENCH	1,000 ft	Fl. 12 x W 10.25"	12	36
62357	TST603W	Green - TRACE-SAFE TRENCH	2,500 ft	Fl. 12 x W 10.25"	27	36
62356	TST603W	Green - TRACE-SAFE TRENCH	5,000 ft	Fl. 12 x W 16.25"	56	18

**WARNING** MULETAPE®, is intended for use only by cable installation professionals. Do not strap, bind or lift items with this product.