

# STAINLESS STEEL 45° & 90° RIGID ELBOWS

## Features:


- Manufactured in both type 304 and 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Threaded both ends
- Threads are protected by color coded plastic caps

## Certifications and Compliances:

- UL / cUL 6A Listed
- UL File # E230584
- Article 344 and Table 2 Chapter 9, National Electrical Code (NEC)
- CSA C22.1
- Canadian Electrical Code (CEC), Part 1, Standard for Electrical Installations

## Options:

Degree of bend can be specified to any value between 5° to 90° Large-radius elbows also available

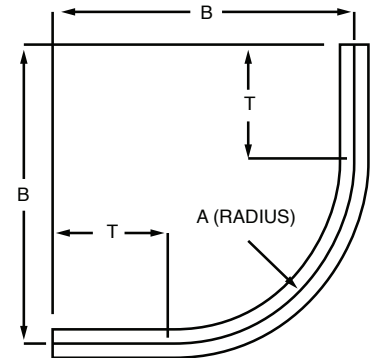

## 90° Rigid Elbow

Type 304 Part Number	Type 316 Part Number	Trade Size (in)	A (in)	Degree of Bend (deg)	T (in)	B (in)
S40590EL00	S60590EL00	½ X 90°	4.00	90.00	3.100	7.500
S40790EL00	S60790EL00	¾ X 90°	4.50	90.00	2.900	7.900
S41090EL00	S61090EL00	1 X 90°	5.80	90.00	3.500	9.900
S41290EL00	S61290EL00	1¼ X 90°	7.30	90.00	4.300	12.400
S41590EL00	S61590EL00	1½ X 90°	8.30	90.00	5.000	14.200
S42090EL00	S62090EL00	2 X 90°	9.50	90.00	4.600	15.300
S42590EL00	S62590EL00	2½ X 90°	10.50	90.00	6.500	18.400
S43090EL00	S63090EL00	3 X 90°	13.00	90.00	6.800	21.600
S44090EL00	S64090EL00	4 X 90°	16.00	90.00	8.400	26.700
S45090EL00	S65090EL00	5 X 90°	24.00	90.00	11.200	37.40
S46090EL00	S66090EL00	6 X 90°	30.00	90.00	12.600	48.90

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [atkore.com/calbrite](http://atkore.com/calbrite)

