



INNERDUCT PULLING PRODUCTS




Swivel Head Innerduct Pulling Eye

The Innerduct Pulling Eye is a hybrid tool that combines features from standard innerduct pulling eyes and Condux swivels. A swivel head prevents twisting and binding of the innerduct as it is installed. It eliminates the need for a separate swivel on each pulling eye when installing single innerducts into individual conduits or multiple innerducts into a single conduit. Its short length is an advantage on tight bends compared to using a separate swivel and pulling eye. Easily installed using a 1 $\frac{3}{8}$ " deep socket or adjustable wrench.

NOTE: To determine correct pulling eye size, obtain the actual innerduct inside diameter (I.D.). The I.D. measurement must be greater than dimension A and smaller than dimension B.

Replacement Clevis Pins for Swivel Head Innerduct Pulling Eyes

Part Number	Replacement Part Number
08960712	08081036
08960715	08081036
08960720	08081036

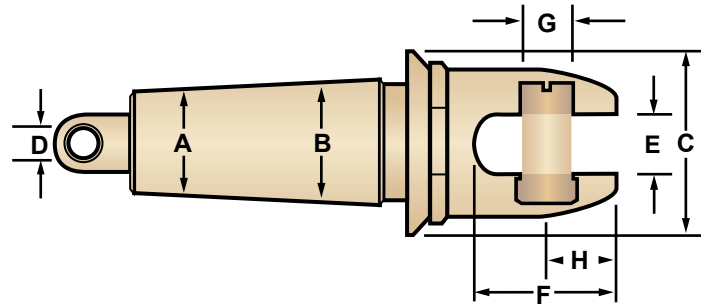

See compatibility chart on page 43 to determine what Innerduct Pulling Eyes work with various standard innerduct sizes.

Part Number	Nominal Size	Innerduct ID Range		Max OD C		Hole Diameter D		Slot Width E		Slot Depth F		Pin Diameter G		Pin Center H	
	(IN.)	A - B (IN.)	A - B (MM)	(IN.)	MM	(IN.)	MM	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08960712	1 - 1.25	1.06 - 1.43	27 - 37	1.75	44	.44	11	.56	14	1.31	33	.43	11	.56	14
08960715	1.50	1.37 - 1.68	35 - 43	2.00	51	.44	11	.56	14	1.31	33	.43	11	.56	14
08960720	2.00	1.93 - 2.12	49 - 54	2.44	62	.44	11	.56	14	1.31	33	.43	11	.56	14

All Swivel Head Innerduct Pulling Eyes are compatible with all Condux pulling harness legs.